

## Digital TACHOMETER STROBOSCOPES

### DT-300 Series

100–30,000 RPM/FPM  
& higher with harmonics

Portable, highly stable and accurate, industrial-quality tools for non-contact RPM measurement, inspection and observation of moving parts by “freezing” or “slowing down” the action.



### DT-311A


115 V AC or 230 V AC

### DT-315A

Internal battery, 12 V DC  
or AC adapter

### DT-315AEB

External battery pack  
or 12 V DC

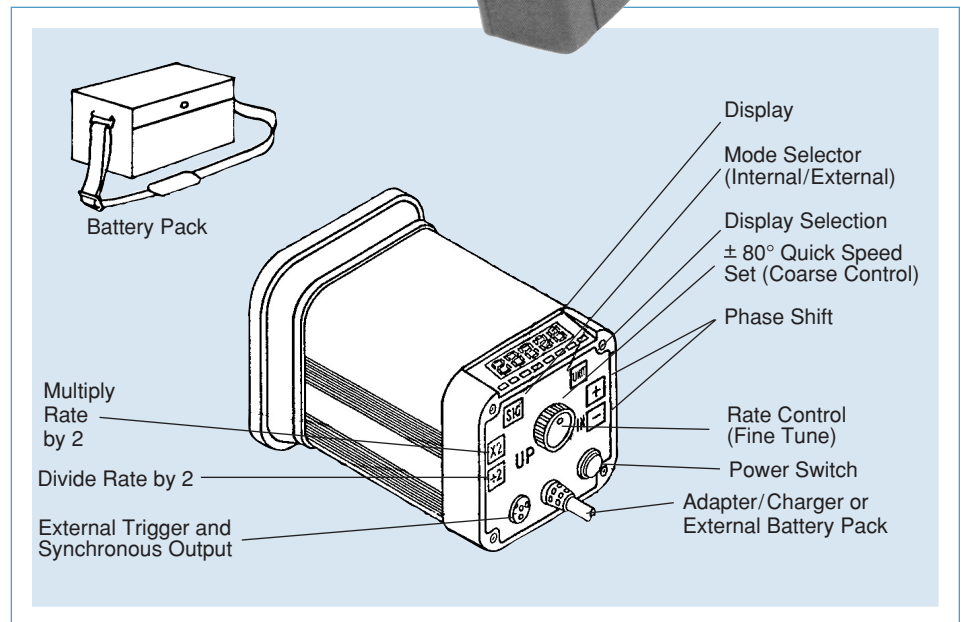

## FEATURES

- Highest accuracy and most stable flash rate
- Easy-to-read LED display
- Easy-to-operate controls
- Detachable pistol-grip handle
- Provides 12 V DC power for external sensors
- Accepts external trigger input and provides synchronizing pulse output
- Phase shift for best view and flash photography
- Coarse and Fine flash rate control
- Instant double and half-rate flash selection for error-free reading

# DT-300 Series Tachometer Stroboscopes

## Specifications (all models)

Flash Range:	100–30,000 FPM	Operating Temperature:	32–104° F (0–40° C)
Accuracy		Display:	5 digits, 10 mm high, red LED
Internal Mode:	± 0.01% of reading	Flashtube:	Xenon, 10 W maximum
External mode:	± 0.01% or ± 1 digit	Flash Duration:	10–30 µs
Drift:	± 0.01% per degree C	Sensor Power Supply:	12 V DC ± 0.6 V, 40 mA
Update Time		<b>External Mode Only</b>	
Internal Mode:	0.2 seconds	Phase Shift:	0–359° with 1° resolution or 0–333 ms from 200–3,000 FPM
External Mode:	1 second	Input Signal Req'd for External Triggering:	5–24 V P–P (not to exceed 35 V to GND), pulse width 50 µs minimum, rise time less than 0.2 ms
Decimal Point:	100.0–1,999.9 and 2,000– 30,000	Input Impedance:	10,000 ohms
Output Signal:	Synchronous, 400 µs pulse, 0 to approx. ± 12 V DC, 1000 ohms impedance		
Display & Rate:	Divide or multiply by 2, selectable		
Low Battery Indicator:	Display shows L's		

Model	Power Requirements
<b>DT-311A</b>	115 V or 230 VAC (specify), 50/60 Hz, 30 VA
<b>DT-315A</b>	115 VAC or 230 VAC Adapter or one (1) hour, internal, rechargeable 12 V battery or external 12 VDC
<b>DT-315AEB</b>	Three (3) hour, external, rechargeable 12 V DC Power Pack or external 12 V DC

Model	Accessories included	Battery Life (charged)	Full Charge Time	Dimensions	Weight
<b>DT-311A</b>	—	N/A	N/A	4.7 x 4.7 x 7.2" (120 x 120 x 183 mm)	2.6 lbs. (1.2 kg)
<b>DT-315A</b>	Internal battery, 12 VDC with 115 VAC or 230 VAC AC Adapter Charger	1 hour at high flash rate	16 hours	4.7 x 5.6 x 9.7" (120 x 141 x 248 mm)	4.4 lbs. (2 kg)
<b>DT-315AEB</b>	External battery pack, 12 V DC, with 115 V AC or 230 V AC Charger & carrying case	3 hours at high flash rate	16 hours	Same as DT-311A	4.5 lbs. (2 kg)
<b>External Battery Pack</b>	(DT-315AEB only)			6.3 x 4.3 x 2.8" (161 x 110 x 71 mm)	4.5 lbs. (2 kg)

Specifications subject to change without notice.

## CHECK·LINE®—PRECISION QUALITY CONTROL INSTRUMENTS

**Electromatic Equipment Co., Inc.**  
600 Oakland Ave.  
Cedarhurst, N Y 11516 —USA

**Tel:** (800) 645-4330 (USA & Canada)  
**Tel:** (516) 295-4300  
**Fax:** (516) 295-4399

**Email:** info@checkline.com  
**Website:** www.checkline.com

**FOR ADDITIONAL INFORMATION OR TO PLACE AN ORDER CALL TOLL FREE 1-800-645-4330**